
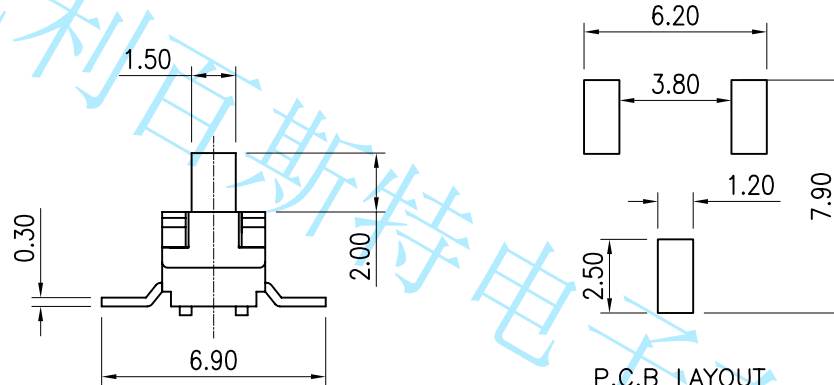
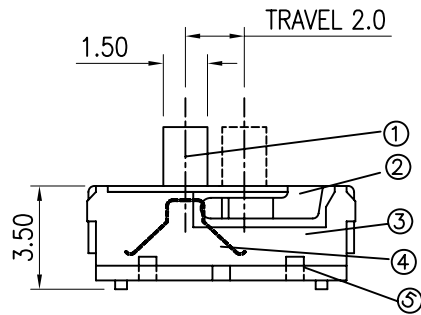



SYMB	REVISIONS	DATE	APVD.
△			
△			
△			

SPECIFICATION:

- 1, CURRENT RATING: DC 30V 0.3A.
- 2, DIELECTRIC WITHSTANDING VOLTAGE: 500V AC R.M.S. FOR ONE MINUTE.
- 3, INSULATION RESISTANCE: 100M OHMS MIN. AT 500V DC
- 4, CONTACT RESISTANCE: 80m OHMS MAX.
- 5, OPERATING TEMPERATURE: -20°C TO +80°C.
- 6, OPERATING LIFE: 10,000 CYCLES.

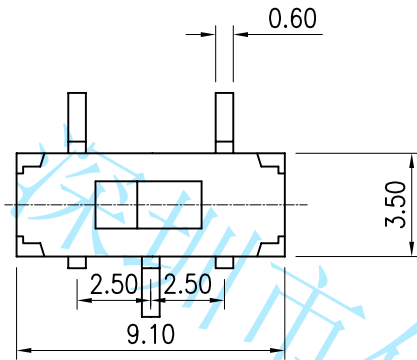

P.C.B LAYOUT
TOP VIEW

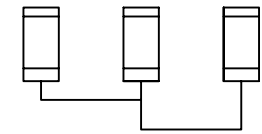

SCHEMATIC CIRCUIT

TYPE	SLIDE SWITCH			TOLERANCE	10					
PART NO	MSS-22D18A-2H			UP TO 10	±0.2	9				
DATE	2015/12/16			ABOVE 10~50	±0.3	8				
UNITE	mm	PAGE	7/7	ABOVE 50~100	±0.5	7				
SCALE	4:1	VERSION	A	ANGLE	±3'	6				
DRAWN	CHECKED	APVD.	PROJECTION			5	TERMINALS	C2680	3	Ag
王建堂	彭信存	缪明震				4	CONTACT	C5210	1	Ag
						3	BOTTOM	PA66	1	BLACK
						2	COVER	SUS	1	NATURAL
						1	STEM	PA66	1	BLACK
NO.	NAME			MATERIAL	QTY:	FINISHING				

YIBST 深圳市亿利百斯特电子有限公司
亿利百斯特