

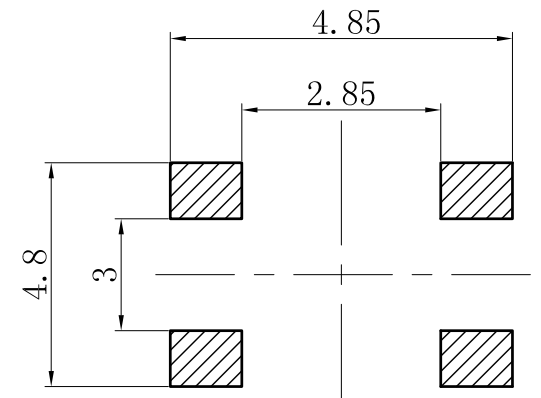


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
								REV (版本)	MARK (标记)	DESCRIPTION (描述)		DATE (日期)	APPROVED (批准)	



ROHS
Compatible

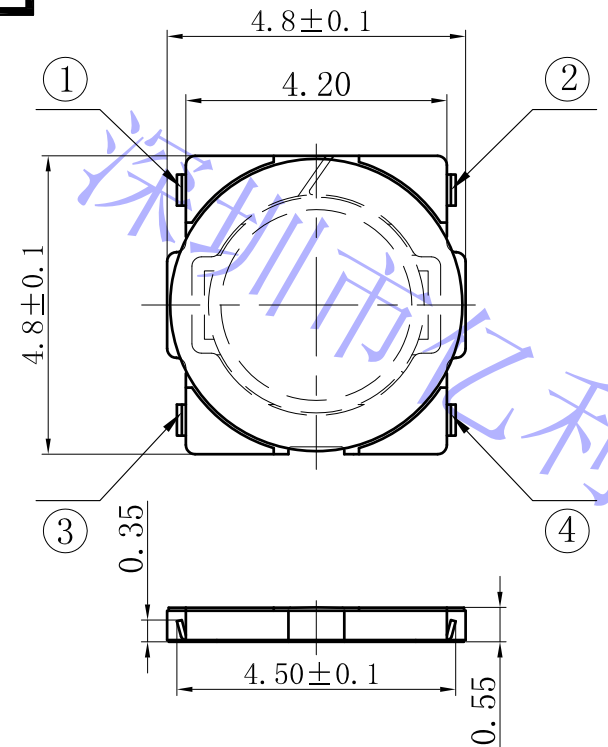

P. C. B LAND DIMENSION



CIRCUIT DIAGRAM

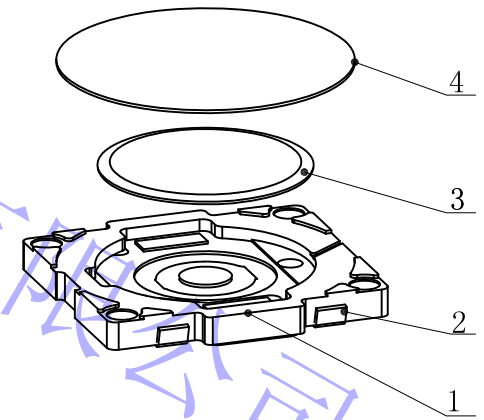

REFERENCE DRAWING

SPECIFICATION

- 1. Rating: DC 12V 50mA Max
- 2. Contact resistance: 100mΩ MAX
- 3. Insulation resistance: 100MΩ Min
- 4. Dielectric strength: 250VAC/min
- 5. Operating force: 250gf±50gf
- 6. Operating life: 200,000 cycles

4	TAPE (防尘胶)		1	PI		——
3	CONTACT FORM (弹 片)		1	SUS301		Silver coated
2	TERMINAL (端 子)		1	PHOSPHOR BRONZE		Ag plating
1	HOUSING (基 座)		1	LCP		WHITE
NO (序号)	PART NAME (部件名)		QTY (数量)	MATERIAL (材料)		REMARK (备注)
E	DRAWN 制 图	QJ. LIN	DATE 日期	2011. 11. 16	SCALE: 1:1 比 例	ITEM 产品类型
	CHKD 审 核	SY. TAN	DATE 日期	2011. 11. 16	VIEW: 视 图	PART NO 型 号
	APVD 批 准		DATE 日期		UNIT:mm 单 位	DWG. NO 图 号
						EL-4801
						3. 604. 257-000



深圳市亿利百斯特电子有限公司
ShenZhen ElyBest Electronics Co., Ltd

UNSPECIFIED TOLERANCE 未指定的公差	
ANGULAR (角度)	±0.5°
16 < L ≤ 63	±0.4
4 < L ≤ 16	±0.3
L ≤ 4	±0.2

DRAWN 制图	CHKD 审核	APVD 批准
-------------	------------	------------