

承認書

APPROVE SHEET



敬請承認如下之形式規格書：

客戶名稱

CUSTOMER: _____

貴公司製品名

本公司製品名：

CUSTOMER PN: _____

PRODUCT PN: _____

防水轻触开关

貴公司規格

本公司規格：

APPROVAL DAT: _____

PRODUCT CODE: _____

EL-CTSW08-B两脚

客戶料號：

本公司規格書編號：

CUSTOMER NO.: _____

PRODUCT DRAWING NO.: _____

☒ 新品承認

NEW APPROVE

☐ 規格變更再承認

CHANGE CODE APPROVE
AGAIN

☐ 材料變更再承認

CHANGE MATERIAL APPROVE
AGAIN

APPROVAL

批准

DATE:

CHECK

審查

DATE:

DESIGN

設計

DATE:

貴公司承認欄

APPROVAL SIGNATURES

請於____年____月____日前承認返回

日期 DATE: _____

PLEASE RETURN TO ADMIT XUNIANRURI

深圳市亿利百斯特电子有限公司

ShenZhen ElyBest Electronics Co., Ltd

付文鹏 (Vincent Fu)

Tel : 0755-28213003

Fax: 0755-85215085

Mob: 18923844556

Email : vincent@elybest.com

Add : 深圳市龙岗区平湖街道世之鼎产业园B栋220

TACT SWITCH SPECIFICATION 轻触开关产品规格书	File No. 文件编号	EL-QS03-01
	Version 版 本	A

一、GENERAL SPECIFICATION 基本说明

- 1.Scope 范围 This specification covers the requirements for single key switches which have no key.
(TACT SWITCHES: MECHANICAL CONTACT).此规范含盖单推柄和无推柄的轻触开关要求。
- 2.Operating Temperature Range 使用温度范围: -20 to 70 °C。
- 3.Storage Temperature Rang 保存温度范围: -20 to 80 °C。

二、TYPE OF ACTUATION 动作类型: Tactile feedback 轻触返回

三、MAXIMUM RATING 最大额定值: DC 12 V, 50 mA

四、TEST ITEM 测试项目

Characteristic 特 性	Item 项次	Test Breed 测试种类	Test Condition 测试条件	Test Requirements 测试要求
Appearance 外观	1	Visual Check 目视检查	Without any external force applied and test prior to the visual way to test. 在未施加任何外力及试验前, 以目视方式测试	Not affect the product appearance of products Bad function defects. 产品的外观不能有影响产品功能之不良缺点
Electrical Performance 电气特性	2	Contact Resistance 接触阻抗	Applying a static load twice the actuating force to the center of the stem, measurements shall be made with a 1 kHz small-current contact resistance meter. 用两倍的动作力作静负载施加于按钮的中心, 并用 1 千赫小电流接触电阻仪测量。	50 mΩMax. 接触阻抗不得高于 50mΩ
	3	Insulation Resistance 绝缘阻抗	Measurements shall be made following application of DC 100 V potential across terminals and across terminals and frame for one minute. 在端子之间, 端子与外壳之间施加 DC100V 一分种。	100 MΩMin 绝缘阻抗不得低于 100MΩ
	4	Dielectric Withstanding Voltage 电气耐压	AC250V (50Hz or 60Hz) shall be applied across terminals and across terminals and frame for one minute. 在端子与端子之间, 端子与外壳之间施加 AC250V(50Hz or 60Hz)。	There shall be no breakdown 没有击穿

TACT SWITCH SPECIFICATION


轻触开关产品规格书

File No.
文件编号


EL-QS03-01


Version
版本

A

Characteristic 特 性	Item 项次	Test Breed 测试种类	Test Condition 测试条件	Test Requirements 测试要求
电气 特性 Electrical Performance	5	Bounce 抖动	Lightly striking the center of the stem at a rate encountered in normal use (3 to 4 operations per sec), Bounce shall be tested at “ON” and “OFF”. 在正常使用中(以每秒 3-4 次周期)轻轻地在手柄中心加力，在通与断瞬间测试抖动。 	5 m sec max . 最大为 5 毫秒
	6	Actuating Force 动作力	Placing the switch such that the direction of switch operation is vertical and then gradually increasing the load applied to the center of the stem, the maximum load required for the stem to come to a stop shall be measured. 开关的动作方向为垂直放置开关向推柄中心逐渐增加负荷直到推柄停止时所测量的最大负荷。	$250 \pm 50 \text{ gf}$
机械 特性 Mechanical	7	Travel 行程	Placing the switch such that the direction of switch operation is vertical and then applying a static load twice the actuation force to the center of the stem, the travel distance for the stem to come to a stop shall be measured. 开关的动作方向为垂直放置开关，在已有行程的推柄中心向上减小压力，推柄回到自由位置时所测到的力。	$0.35 \pm 0.1 \text{ mm}$

TACT SWITCH SPECIFICATION 轻触开关产品规格书			File No. 文件编号	EL-QS03-01
			Version 版 本	A
Characteristic 特 性	Item 项次	Test Breed 测试种类	Test Condition 测试条件	Test Requirements 测试要求
机械 特性 Mechanical	8	Return Force 返弹力	The sample switch is installed such that the direction of switch operation is vertical and, upon depression of the stem in its center the whole travel distance, the force of the stem to return to its free position shall be measured. 开关的动作方向垂直放置开关, 在已有行程的推柄中心向上减小压力, 推柄回到自由位置时所测量到的力。	70gfMin
	9	Stop Strength 静止强度	Placing the switch such that the direction of switch operation is vertical, a static load of <u>3</u> kgf shall be applied in the direction of stem operation for a period of <u>60</u> seconds. 开关的动作方向为垂直放置开关, 在推柄动作方向施加 3 KG 的静负荷, 60 秒时间。	There shall be no sign of damage mechanically and electrically 无机械的和电气的损伤迹象
	10	Stem Strength 推柄强度	Placing the switch such that the direction of switch operation is vertical, the maximum force to withstand a pull applied opposite to the direction of stem operation shall be measured. 开关的动作方向为垂直放置开关从推柄动作方向反方向施加拉力所测量到的最大承受力。	3 kgf
环 境 Environmental	11	Resistance to Low Temperatures 耐低温	Following the test set forth below the sample shall be left in normal temperature and humidity conditions for one hour before measurements are made: 样品按下列条件进行耐低温试验, 测试前在正常温度和湿度条例上放置 1 小时 (1) Temperature 温度: -30±2℃ (2) Time 时间: 96 hours (3) Water drops shall be removed 擦除水珠	Item 2~5 Item 6 Item 7

TACT SWITCH SPECIFICATION 轻触开关产品规格书			File No. 文件编号	EL-QS03-01
			Version 版本	A
Characteristic 特 性	Item 项次	Test Breed 测试种类	Test Condition 测试条件	Test Requirements 测试要求
Environmental 环 境	12	Heat Resistance 耐热	Following the test set forth below the sample shall be left in normal temperature and humidity conditions for one hour before measurements are made.样品按下列条件进行耐热试验，测试前在正常温度和湿度条件下放置 1 小时 (1) Temperature 温度: $80\pm 2^{\circ}\text{C}$ (2) Time 时间: 96 hours	Item 2~5 Item 6 Item 7
	13	Moisture Resistance 耐潮湿	Following the test set forth below the sample shall be left in normal temperature and humidity conditions for one hour before measurements are made: 样品按下列条件进行耐潮湿试验，测试前在正常温度和湿度条件下放置 1 小时 样品按下列条件进行耐潮湿试验，测试前在正常温度和湿度条件下放置 1 小时 (1) Temperature 温度: $60\pm 2^{\circ}\text{C}$ (2) Relative humidity 相对湿度: 90 to 95% (3) Time 时间: 96 hours (4) Water drops shall be removed 擦除水珠	Contact resistance: 100 m ohm max. Insulation resistance 10 M ohm min. 1.接触电阻最大 100 mΩ. 2.绝缘电阻最小 10 MΩ. Item 2~5 Item 6 Item 7
	14	Temperature Cycling 温度循环	Following the test set forth below the sample shall be left in normal temperature and humidity conditions for one hour before measurements are made.样品按下列条件进行温度循环试验，测试前在正常温度和湿度条件下放置 1 小时 During this test, water drops shall be removed.在试验期间，擦除水珠。 	Item 2~5 Item 6 Item 7

TACT SWITCH SPECIFICATION 轻触开关产品规格书			File No. 文件编号	EL-QS03-01
			Version 版本	A
Characteristic 特性	Item 项次	Test Breed 测试种类	Test Condition 测试条件	Test Requirements 测试要求
Endurance 耐久性	15	Operating Life 动作寿命	Measurements shall be made following the test set forth below: (1) DC 12V 50mA resistive load 阻性负载: DC 12V 50mA (2) Rate of operation : 2 to 3 operations per second 动作频率: 2-3 次/每秒。 (3) Depression 动作力: 250±50gf (4) Cycles of operation 动作次数 100,000 次。	1-Contact resistance: 1000m Ω Max 接触电阻 2-Insulation resistance 100M Ω min. 绝缘电阻 3-action force attenuation rate was 15% of the initial value 动作力衰减率为初始值的 15%左右。
	16	Vibration Resistance 耐振动	Measurements shall be made following the test set forth below: 按下下列条件进行抗振动试验 (1) Range of oscillation: 10~55 Hz 频率范围 (2) Amplitude pk to pk : 1.5mm 振幅: 峰-峰 1.5mm (3) Cycle of sweep : 10-55-10Hz in one minute.扫描周期: 10-55-10-Hz 约一分钟内。 (4) Mode of sweep : Logarithmically sweep or uniform sweep. 扫描方式: 对数扫描或统一的扫描。 (5) Direction of oscillation: 振动方向 Three mutually perpendicular directions, including the direction of stem travel. 3 个相互垂直方向, 包括推柄行程方向 (6) Duration of testing 持续时间 2 hours each ,for a total of 6hours.. 每方向 2 小时, 共 6 小时	Item 2~5 Item 6 Item 7
	17	Impact Shock Resistance 抗冲击	Measurements shall be made following the test set forth below: 按下下列条件进行冲击试验 (1) Acceleration 加速度: 80g (2) Cycles of test :3 cycles each in 6 directions.for a total of 18 cycles. 试验次数: 每个方向 3 次, 6 个方向共 18 次 	Item 2~5 Item 6 Item 7

TACT SWITCH SPECIFICATION

轻触开关产品规格书

File No.
文件编号

EL-QS03-01

Version
版 本

A

五、CONDITIONS FOR SOLDERING 焊接条件

Wave soldering conditions 波峰焊条件

Preheat: Temperature on the copper foil surface should reach 180°C, 2±0.3 minutes after


The P.W.B entered into the soldering equipment

预热: 在 P.W.B(印刷线路板)进入焊接设备后, 2±0.3 分钟内铜箔表面要达到 180°C。

Soldering heat: Temperature on the copper foil surface should reach the peak temperature of 240°C

within 20 seconds after the P.W.B entered into soldering heat zone.

焊接温度: 在 P.W.B (印刷线路板)进入焊接温区 20 秒内, 铜箔表面达到峰值温度 240°C。

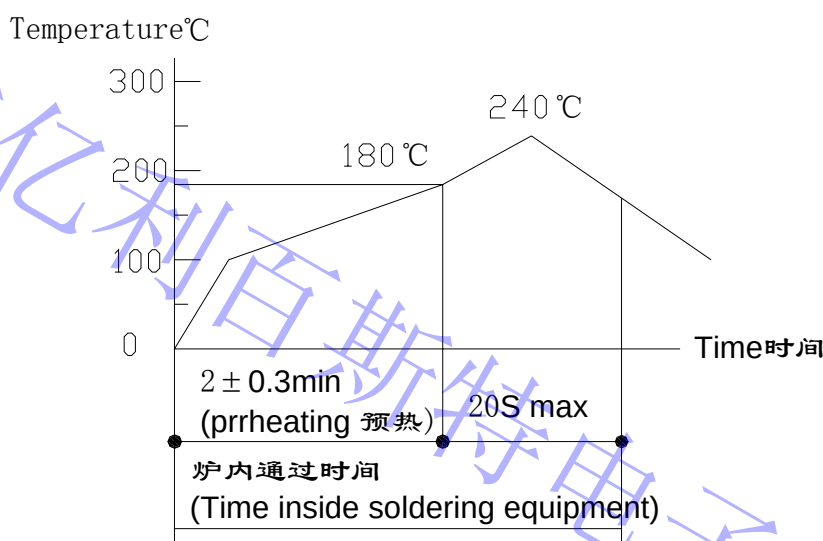

六、OTHER PRECAUTIONS 其他注意事项

- (1) **Following the soldering process, do not try to clean the switch with a solvent or the like .**
进行焊接过程中, 不可以用溶剂或类似品清洗开关。
- (2) **Safeguard the switch assembly against flux penetration from its topside.**
防止助焊剂从开关的顶端渗入。
- (3) **The product is ensured to keep in close status and kindly noted the storage time not exceed 90 days after delivery.**
交货后保证开关处于封密状态, 请注意库存时间不要超过 90 天以上。

七、本公司的 WS050-250AR 防水防尘等级的规定和试验方法。

- (1) WS050-250AR 防水防尘等级 为 IP67 级
- (2) 试验方法 IP67

方法名称: 持续潜水试验。

试验设备, 试验条件和: 其尺寸应使试样放进 60 度水温浸水箱后, 样品底部到水面的距离至 10cm 。

试验时间: 5 小时

试验结果: 产品内部无渗水现象 产品性能不变。

TACT SWITCH SPECIFICATION

轻触开关产品规格书

File No.
文件编号

EL-QS03-01

Version
版本

A

八、SWITCH HANDLING PRECAUTION 使用开关时注意事项

1. In case an automatic flow soldering apparatus is use for soldering.

用自动焊接设备焊接时应参照如下条件

ITEM 项 目	SOLDERING CONDITIONS 焊接条件
PREHEAT TEMPERATURE 预热温度	180°C MAX (AMBIENT TEMPERATURE OF PRINTED CIRCUIT BOARD ON ITS SOLDERING SIDE) (电路板周围焊锡面的温度)
PREHEAT TIME 预热时间	45 SEC MAX 45 秒 MAX
FLUX FOAMING 助焊剂浸泡	TO SUCH AN EXTENT THAT FLUX WILL BE KEPT FLUSH WITH THE PRINTED CIRCUIT BOARDS, TOP SURFACE ON WHICH COMPONENTS ARE MOUNTED. PRDPARATORY FLUX MUST NOT BE APPLIED TO THAT SODE OF PRINTED CIRCUIT BOARD ON WHICH COMPONENTS ARE MOUNTED AND TO THE AREA WHIERE TERMINALS ARE LOCATED. 助焊剂应涂在电路板上组装开关的印刷面上半部位, 应防止助 焊剂过量到电路板.
SOLDERIN TEMPERATURE 焊锡温度	240°C MAX 240°C MAX
DURATION OF SOLDER IMMERSION 焊接时间	5 SEC MAX 5 秒 MAX
ALLOWABLE FREQUENCY 允许重焊次数	2 TIMES MAX 2 次 MAX

2. Other precautions 其他注意事项

- (1) FOLLOWING THE SOLDERING PROCESS, DO NOT TRY TO CLEAN THE SWITCH SOLVENT OR THE LIKE.
进行焊接工艺时不应使用不整洁的东西对开关进行清洁。
- (2) SAFEGUARD THE SWITCH ASSEMBLY AGAINST FLUX PENETRA TION FROM ITS TOP SIDE.
在组装开关时应防止助焊剂从开关的上部流入到开关内部。

MATERIAL CERTIFICATE OF CONFIRMATION


材料确认书

Model No.: WS050-250AR







型 号: WS050-250AR

SENIAL NUMBER 序号	DESCRIPTION 名 称	MATERIAL 材 料	Color/PLATING 颜色/镀层	SGS CARD BOOK NUMBER SGS 证书号	SGS TEST DATE SGS 检测日期
1	TERMINAL 嵌件	H62Y 0.3t 0.3 厚的黄铜	D.Ag	SHAEC1402440303 SHAEC1400033309	2014. 02. 06 2014. 01. 06
2	FOUNDATION 基座	PPA	BLACK 黑色	(6613) 212-0991	2013. 08. 06
3	DOME CONTACT 弹片	Silver-copper complex 覆银铜	/	F690101/LF-CTSAYAA13- 51536	2013. 11. 18
4	BUTTON 帽头	硅胶	RED 红色	CANEC1319193702	2013. 12. 12
5	STRETCHING LAP 拉伸盖板	H65M 0.3t 0.3 厚的黄铜	D.CuSn	SHAEC1402440303 SHAEC1400033303	2014. 02. 06 2014. 01. 06

注:相关产品图纸请参照规格图

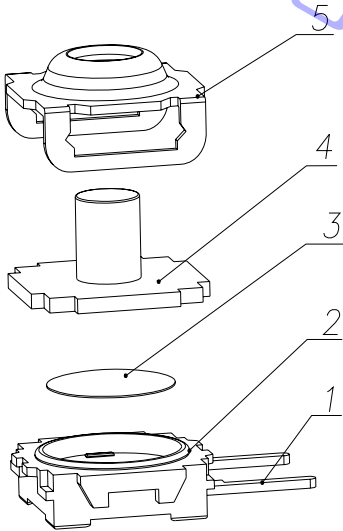

WE HEREBY CERTIFY THAT ABOVE MENTIONED DESCRIPTION ARE TRUE.
我们特此证明上面的描述是真实的

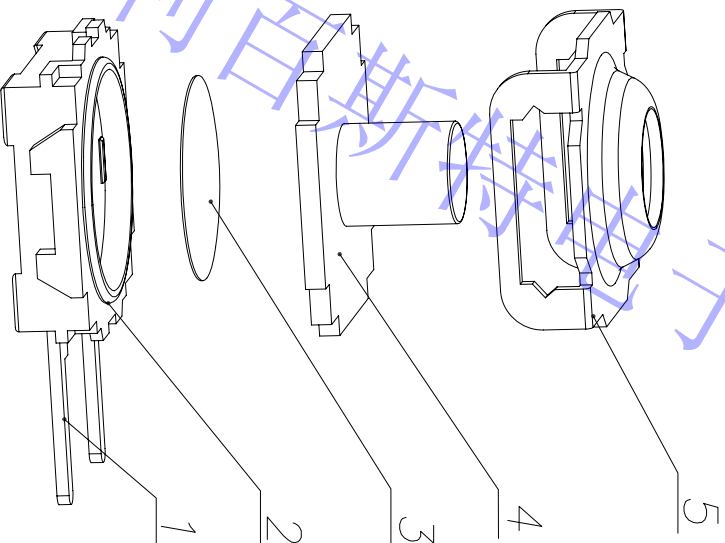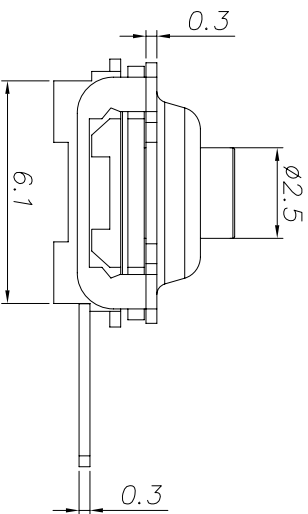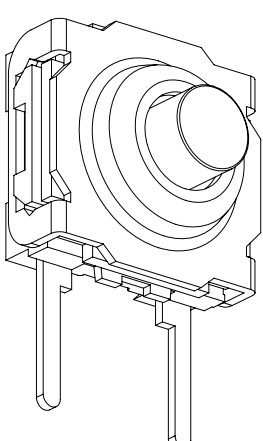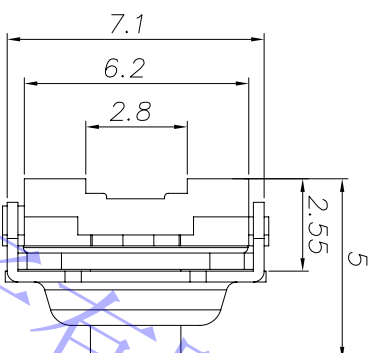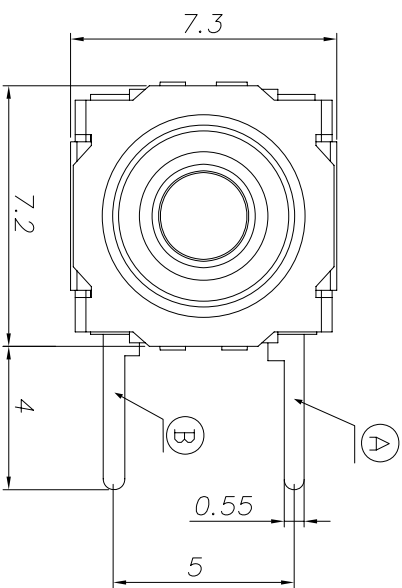

1. Rating:DC12V 50mA.
2. Travel:0.35±0.1mm
3. Operating Force: 250±50gf
4. Contact Resistance:50mΩ Max.
5. Life:100,000 Cycles Min.

5	拉伸盖板	黄铜	—	镀铜锡
4	帽头	硅胶	红色	—
3	弹片	覆银铜	—	材料进口
2	底座	PPA	黑色	清洗
1	嵌件	黄铜	—	镀银

序号	名称	材料	颜色	备注
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

亿利百斯特 Shenzhen Elybest Electronics Co., Ltd

品名 ITEM NO. 防水轻触开关

料号 PART NO. EL-CTSM08-B两脚

图号 DRAWING NO. B 批号

SCALE UNIT mm A4

工程变更通知单 EON(DCN) NO.	版次 REV	日期 DATE	说明 DESCRIPTION	变更 CHANGE	承認 APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	設計 校閱	承認	SCALE	UNIT	mm	A4	地球仪
----------------------	--------	---------	----------------	-----------	-----------	--	-------	----	-------	------	----	----	-----