


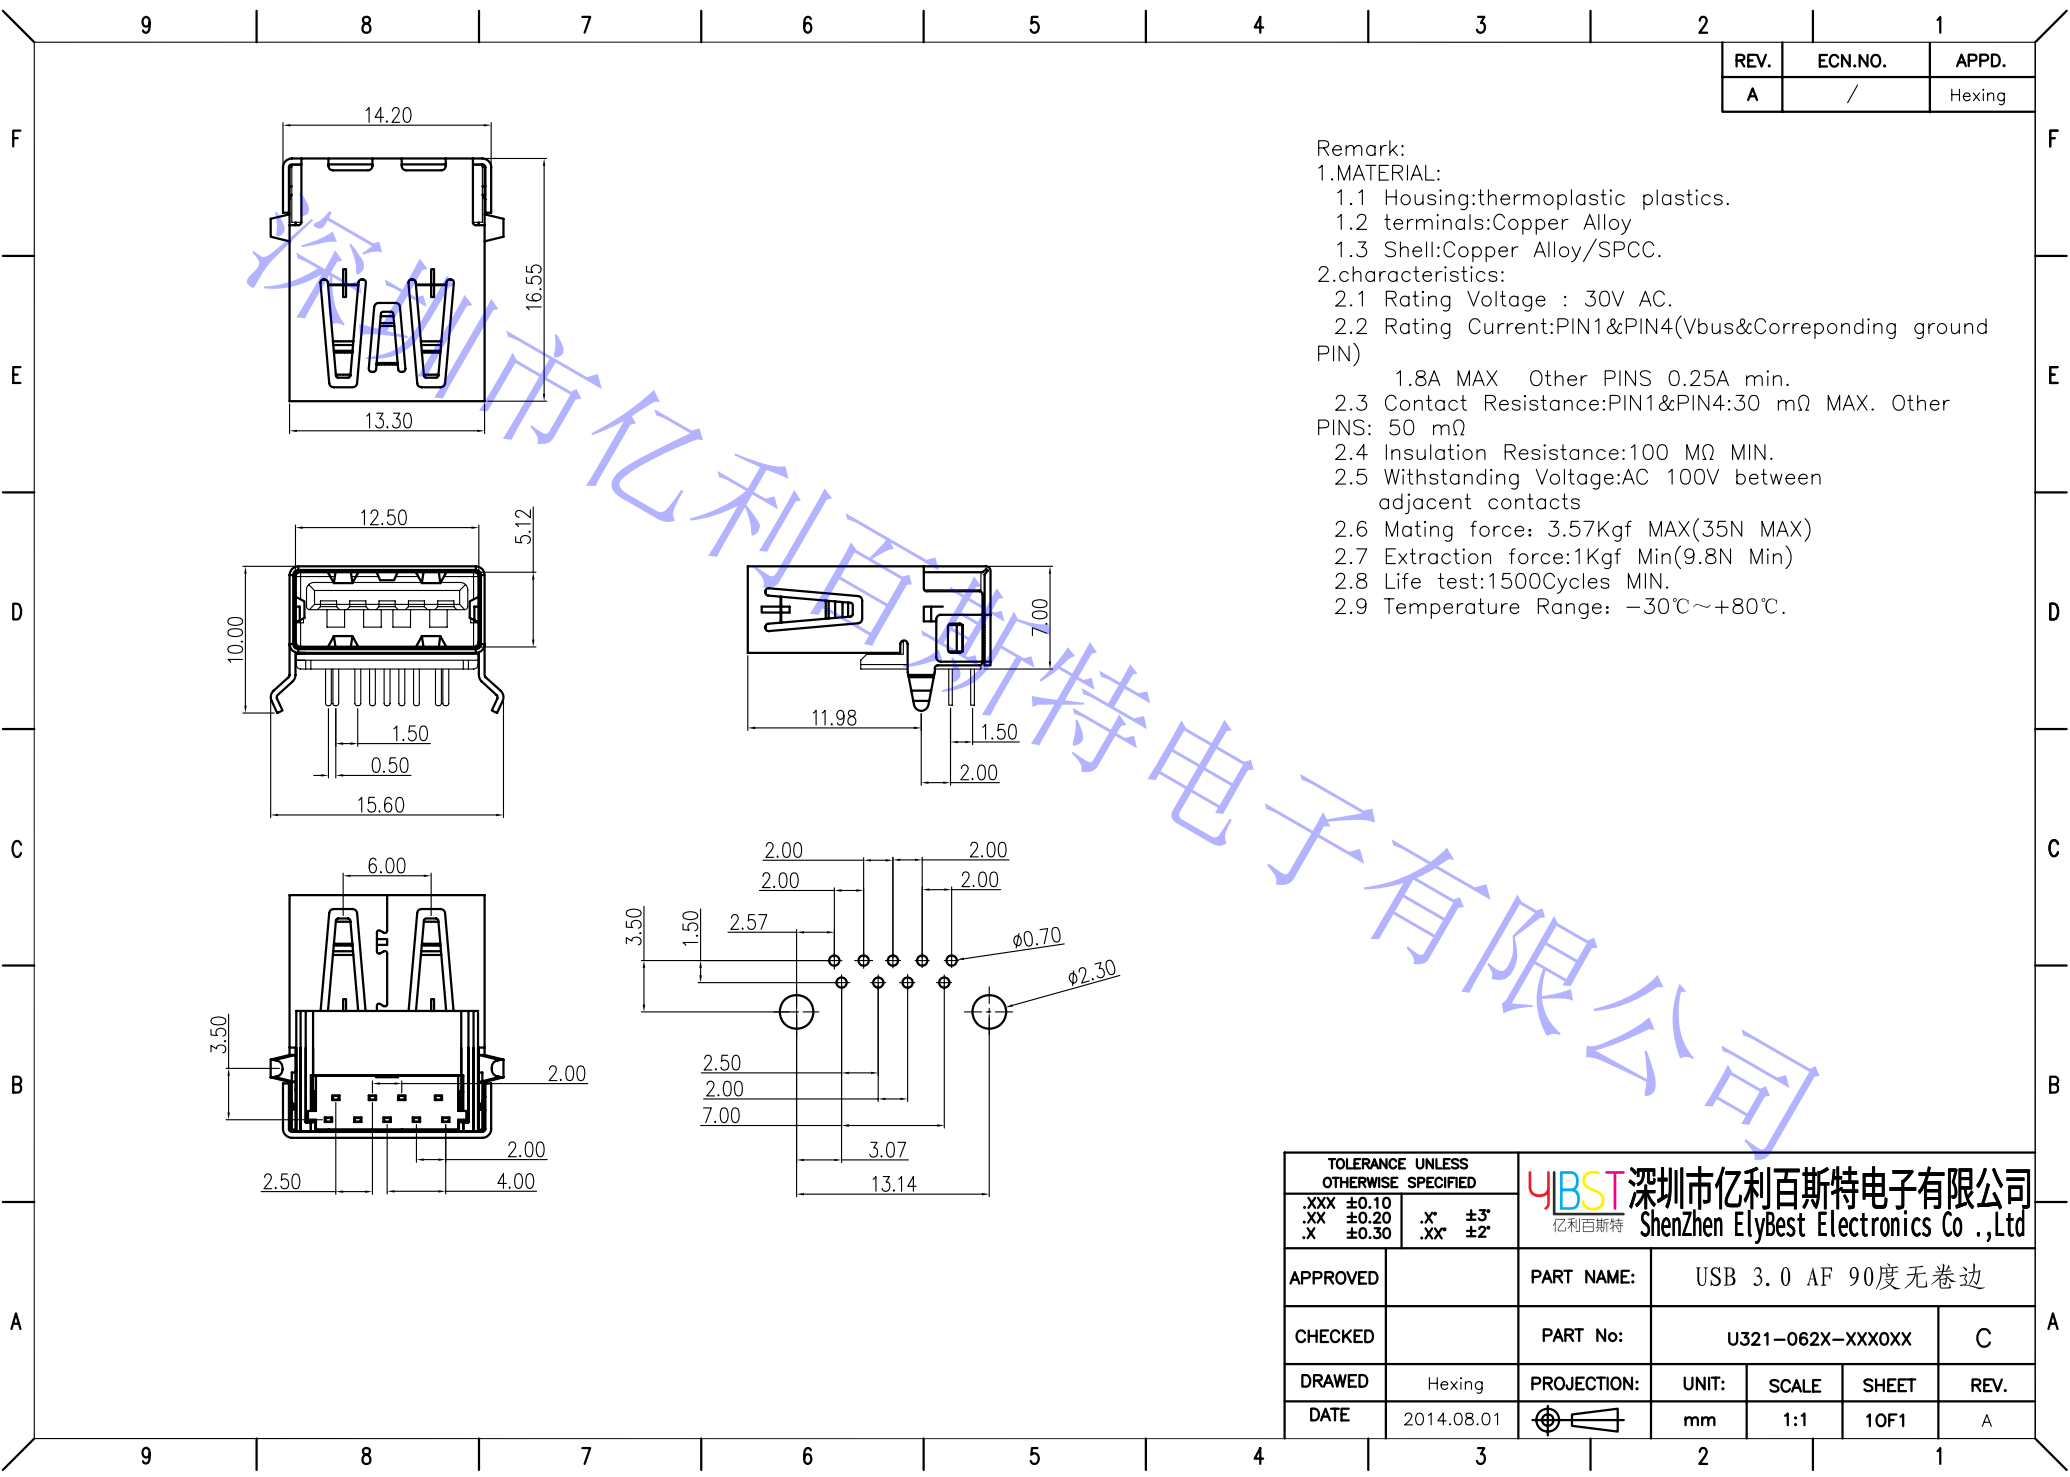

REV.	ECN.NO.	APPD.
A	/	Hexing

Remark:

1.MATERIAL:

1.1 Housing:thermoplastic plastics.

1.2 terminals:Copper Alloy

1.3 Shell:Copper Alloy/SPCC.

2.characteristics:

2.1 Rating Voltage : 30V AC.

2.2 Rating Current:PIN1&PIN4(Vbus&Correponding ground PIN)

1.8A MAX Other PINS 0.25A min.

2.3 Contact Resistance:PIN1&PIN4:30 mΩ MAX. Other PINS: 50 mΩ

2.4 Insulation Resistance:100 MΩ MIN.

2.5 Withstanding Voltage:AC 100V between adjacent contacts

2.6 Mating force: 3.57Kg MAX(35N MAX)

2.7 Extraction force:1Kg Min(9.8N Min)

2.8 Life test:1500Cycles MIN.

2.9 Temperature Range: -30℃~+80℃.

TOLERANCE UNLESS OTHERWISE SPECIFIED		yibst 深圳市亿利百斯特电子有限公司 ShenZhen ElyBest Electronics Co.,Ltd					
.XXX ±0.10	.XX ±0.20	.X ±0.30	.X ±0.30	.X ±0.30	.X ±0.30	.X ±0.30	.X ±0.30
APPROVED		PART NAME:	USB 3.0 AF 90度无卷边				
CHECKED		PART No:	U321-062X-XXX0XX				C
DRAWN	Hexing	PROJECTION:	UNIT:	SCALE	SHEET	REV.	
DATE	2014.08.01		mm	1:1	10F1	A	