
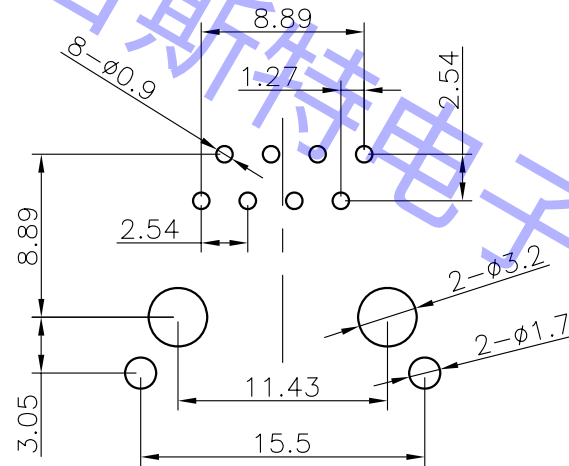
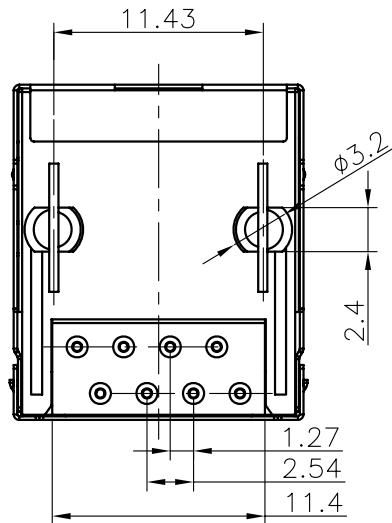
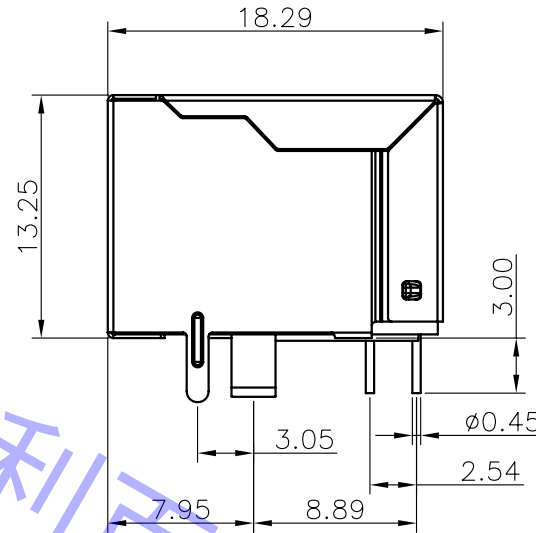


REV.	ECN.NO.	APPD.
A	/	pcy

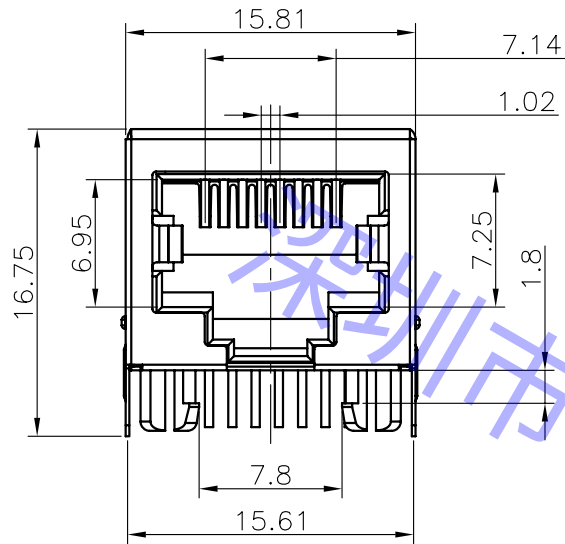

P.C.B LAYOUT TOP VIEW

NOTES:

1.MATERIAL:

- 1.1 Housing:thermoplastic plastics
- 1.2 terminals:Copper Alloy
Gold plated in contact area:
OR Gold Plated overall
- 1.3 Shell:Steel&Copper Alloy
Nickel/Tin Plated overall

2.ELECTRICAL CHARACTERISTICS:

- 2.1 Rating Current :1.5 Ampere
- 2.2 Rating Voltage :125 V Max
- 2.3 Contact Resistance:50 Milli ohms
- 2.4 Insulation Resistance:500 Mega ohms Min.

3.MECHANICAL CHARACTERISTICS:

- 3.1 Connector Mating force: 2.27kgf MAX
- 3.2 Durability:750Cycles.

4.ENVIRONMENT CHARACTERISTICS:

- 4.1 Operating temperature:-40℃ to +85℃
- 4.2 Storage temperature:-10℃ to +40℃

R550-110X1-XXX0X1

LED COLOUR

- 0:Without,
- 1:Green/Yellow
- 2:Yellow/Green
- 6:Yellow/Green Orange

- 1:1u", 3:3u"
- 5:5u", 8:15u"
- A:30u", B:50u"
- G:gold flash

- 1:tray
- 8:Tape&Reel
- 1:Black
- 4:Yellow 107C
- T:Yellow 114C
- P:Blue 285C
- 2:PBT
- 3:PA46
- 5:PA9T
- 6:LCP

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.XXX ±0.10	.X' ±3'
.XX ±0.20	.XX' ±2'
.X ±0.30	

4IBST 深圳市亿利百斯特电子有限公司
ShenZhen ElyBest Electronics Co., Ltd

APPROVED		PART NAME:	RJ45单PORT 90度无灯无弹脚前3.05				
CHECKED		PART No:	R550-110X1-XXX0X1		C		
DRAWN	pengchaoyong	PROJECTION:	UNIT:	SCALE	SHEET	REV.	
DATE	2015.05.29		mm	1:1	10F1	A	