


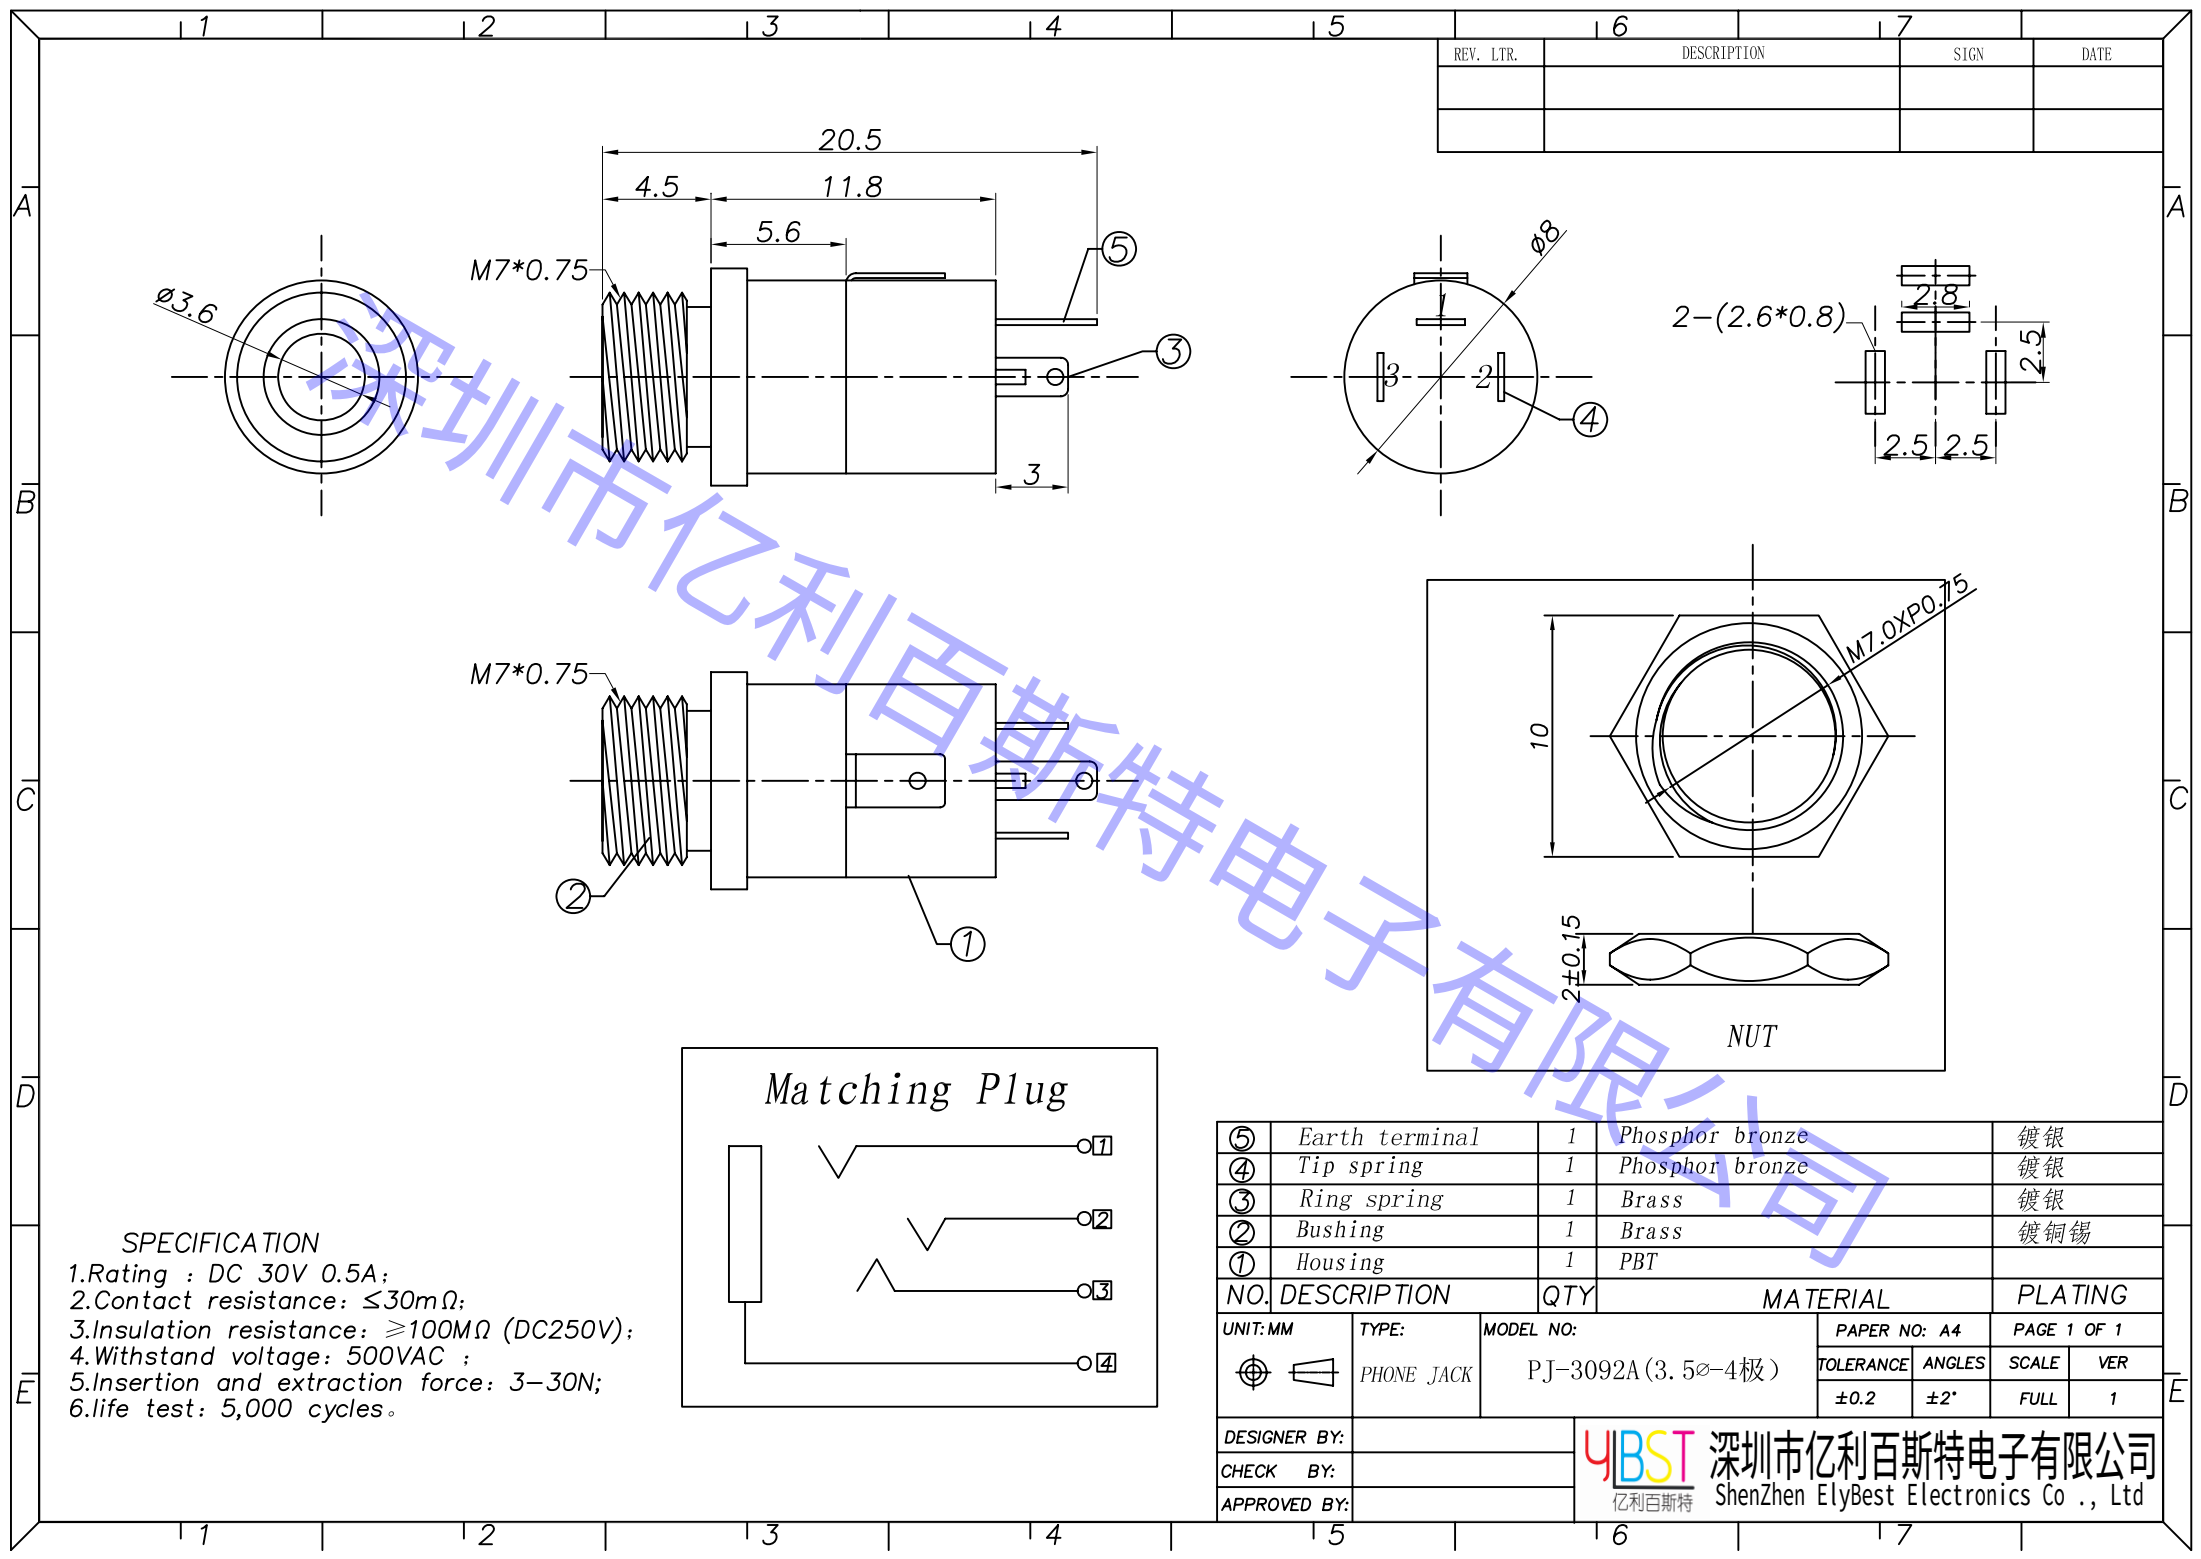

SPECIFICATION

1.Rating : DC 30V 0.5A;


2.Contact resistance: $\leq 30m\Omega$;

3.Insulation resistance: $\geq 100M\Omega$ (DC250V);

4.Withstand voltage: 500VAC ;

5.Insertion and extraction force: 3-30N;

6.life test: 5,000 cycles。

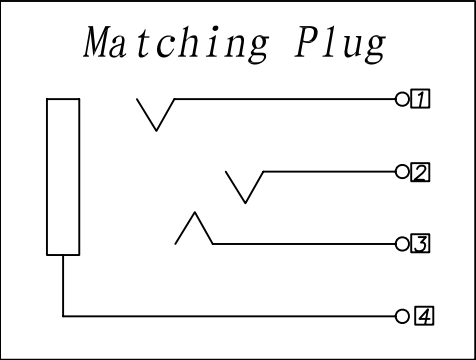

⑤	Earth terminal	1	Phosphor bronze	镀银
④	Tip spring	1	Phosphor bronze	镀银
③	Ring spring	1	Brass	镀银
②	Bushing	1	Brass	镀铜锡
①	Housing	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
	PHONE JACK	PJ-3092A (3.5-4极)	TOLERANCE	ANGLES
			±0.2	±2°
DESIGNER BY:			SCALE	VER
CHECK BY:			FULL	1
APPROVED BY:				

4IBST 深圳市亿利百斯特电子有限公司

ShenZhen ElyBest Electronics Co., Ltd