


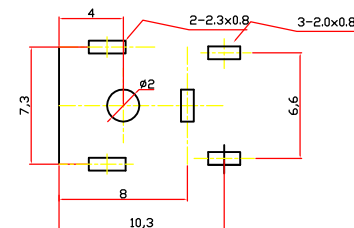



REV.	ECN NO.	REVISED	DATE



NOTES:

1.ELECTRIC CHARACTERISTICS:

- 1-1.CONTACT CURRENT RATING: 4A.
- 1-2.CONTACT VOLTAGE RATING: 20V DC.
- 1-3.CONTACT RESISTANCE: 30m Ω MAX.;
- 1-4.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC;
- 1-5.INSULATION RESISTANCE: 100M Ω MIN.AT DC 500V.

2.MECHANICAL CHARACTERISTICS:

- 2-1.DURABILITY:3000 CYCLES.
- 2-2.INSERTION AND EXTRACTION FORCE:
- 2-2.1.INSERTION FORCE: 30N MAX.
- 2-2.2.EXTRACTION FORCE: 3N MIN.

3.ENVIRENMENT CHARACTERISTICS:

- 3-1.OPERATING TEMPERATURE:-25 $^{\circ}$ C~+85 $^{\circ}$ C.
- 3-2.HUMIDTY:45~85% RH.

Model NO.	DC00360-_G	DC00360-_H	DC00360-_I	DC00360-_J
	DC0036A-_G	DC0036A-_H	DC0036A-_I	DC0036A-_J
	DC0036B-_G	DC0036B-_H	DC0036B-_I	DC0036B-_J
PIN	1.65	2.0	2.35	2.5
DC MATE PLUG	4.75	5.5	5.5	5.5

6	屏蔽	1	黄铜 T=0.2mm	Ni PLATED
5	基座	1	PBT	BLACK
4	平片	1	黄铜 T=0.3mm	Ag PLATED
3	开关静片	1	黄铜 T=0.25mm	Ag PLATED
2	开关弹片	1	锰钢T=0.2mm	Ag PLATED
1	电极中心柱	1	黄铜	CuSn PLATED
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS: ANGLES:
X : ± 0.30 X : $\pm 1^{\circ}$
X.X : ± 0.20 X.X : $\pm 0.5^{\circ}$
X.XX : ± 0.10
X.XXX : ± 0.05

WEIGHT:

g

SCALE: 1:1

UNIT: mm

DSND

CHKD

APVD

SIZE: A4

REV.: A/0

DATE

DATE

DATE

VIEW:

OBJECT:TPV

MODEL TYPE:

DC JACK

PART NO:

DC-036

DWN. NO.: RD01-XXX

YIBST
亿利百斯特

深圳市亿利百斯特电子有限公司