



ROHS

SPECIFICATION



- 1、Insertion force : 2.94~29.4N(0.3~3.0kgf)
- 2、Extraction force : 2.94~29.4N(0.3~3.0kgf)
- 3、Contact resistance : ≤50mΩ
- 4、Insulation resistance : >100MΩ DC 500V
- 5、Withstand voltage : AC 500V 1min
- 6、life test : 5000 10~20time /min
- 7、Rating : DC 12V 1A
- 8、Operation temperature range : -25~85℃
- 9、Recommend used plug :

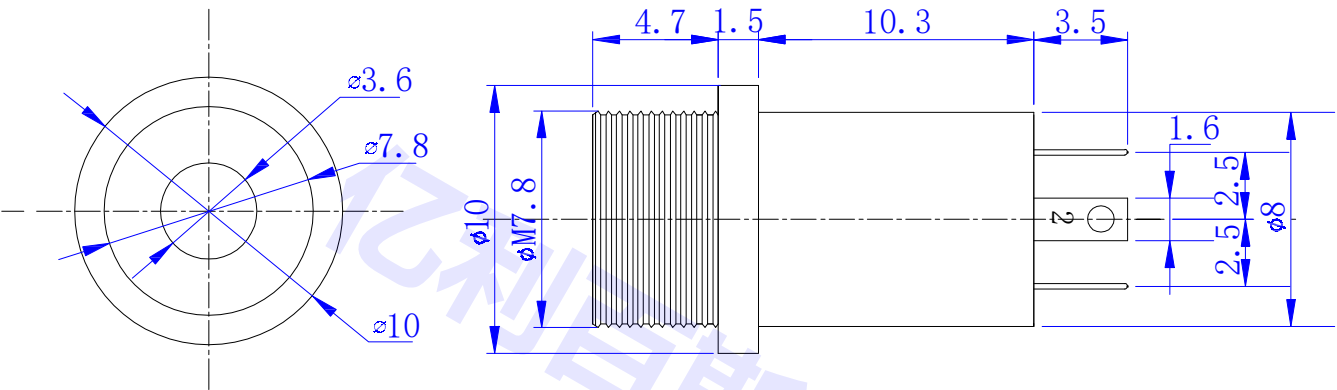

HEX NET

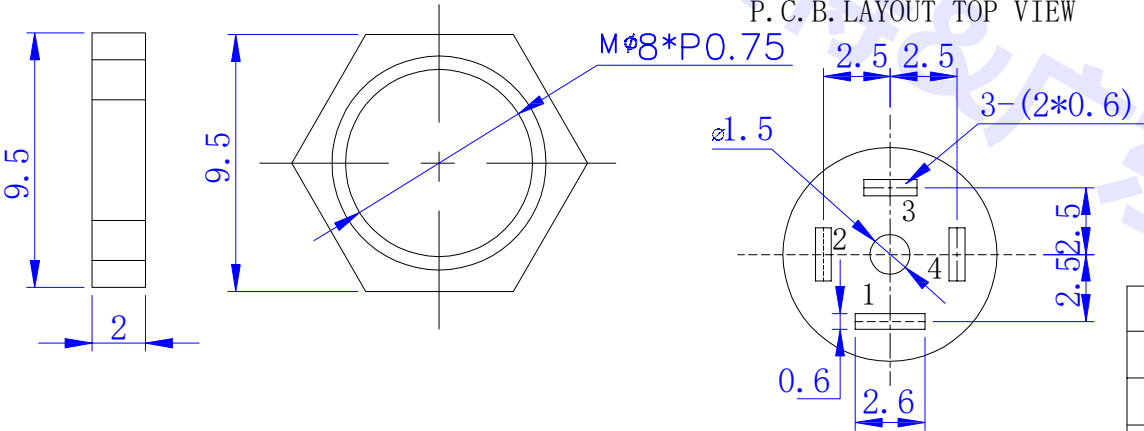

P. C. B. LAYOUT TOP VIEW

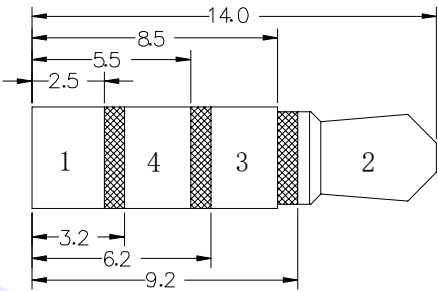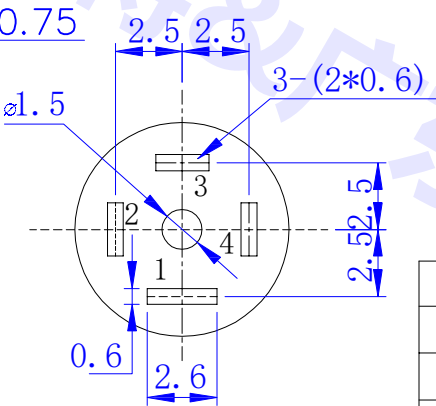

SCHEMATIC	PJ-31640-1	PJ-31640-2	PJ-31640-3	PJ-31640-4

NO	PART NO	DESCRIPTION	MATERIAL	QTY	PLATING/COLOR	MARK
1	PJ-31640-1#	1#	BRONZE=0.25	1PCS	Au	
2	PJ-31640-2#	2#	BRONZE=0.25	1PCS	Au	
3	PJ-31640-3#	3#	BRONZE=0.25	1PCS	Au	
4	PJ-31640-4#	4#	BRONZE=0.25	1PCS	Au	
5	PJ-31640- Housing	Housing	PBT	1PCS	Black	
6	PJ-31640- Block	Block	PBT	1PCS	Black	

GDEL 深圳市亿利百斯特电子有限公司			1. 线性 X ±0.15 X.X ±0.10 X.XX ±0.05		2. 角度 XX' ±3' X' ±2' X.X' ±1'	
			审核	日期	2015. 05. 27	品名
			批准	日期	2015. 05. 27	型号
			比例	单位	工程师	页码
			3. 5 PHONE JACK		PJ-31640	
			1F1	A4		