
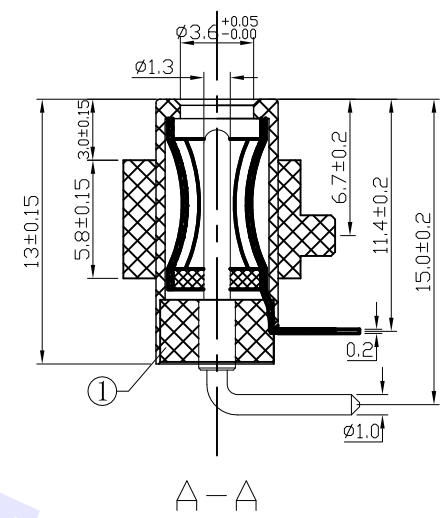
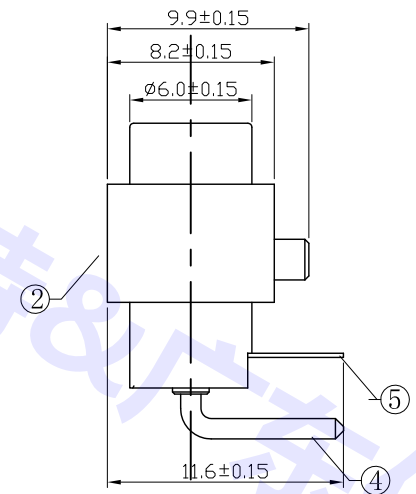

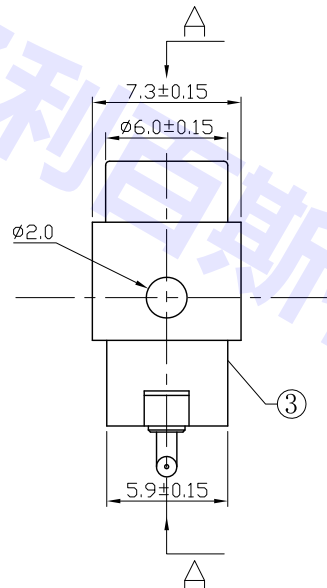


REVISIONS			
REV.	LTR	DESCRIPTION	DATE



SPECIFICATION

- Rating : DC 24V 3A;
- Contact resistance: $\leq 30\text{m}\Omega$;
- Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
- Withstand voltage: 500VAC ;
- Insertion and extraction force: 2-20N;
- life test: 5,000 cycles.

⑤	Tip spring	1	Bronze C5191		Sn-Plating
④	Pin	1	Brass C3604		Sn-Plating
③	ø6 brass pipe	2	Brass C3604		Sn-Plating
②	Inner	1	PBT		Black
①	Housing	1	PBT		Black
NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	PLATING
UNIT: MM		TYPE:		MODEL NO:	PAPER NO: A4
		DC POWER JACK		DC-083A (孔径3.6)	PAGE 1 OF 1
DESIGNER BY:		CHECK BY:		APPROVED BY:	TOLERANCE
					±0.3
					ANGLES
					±2°
					SCALE
					FULL
					VER
					2

GDEL 深圳市亿利百斯特电子有限公司
广东亿利精密电子有限公司