


ROHS

版 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20180917
V2.0			增加10±0.2	June	20200715

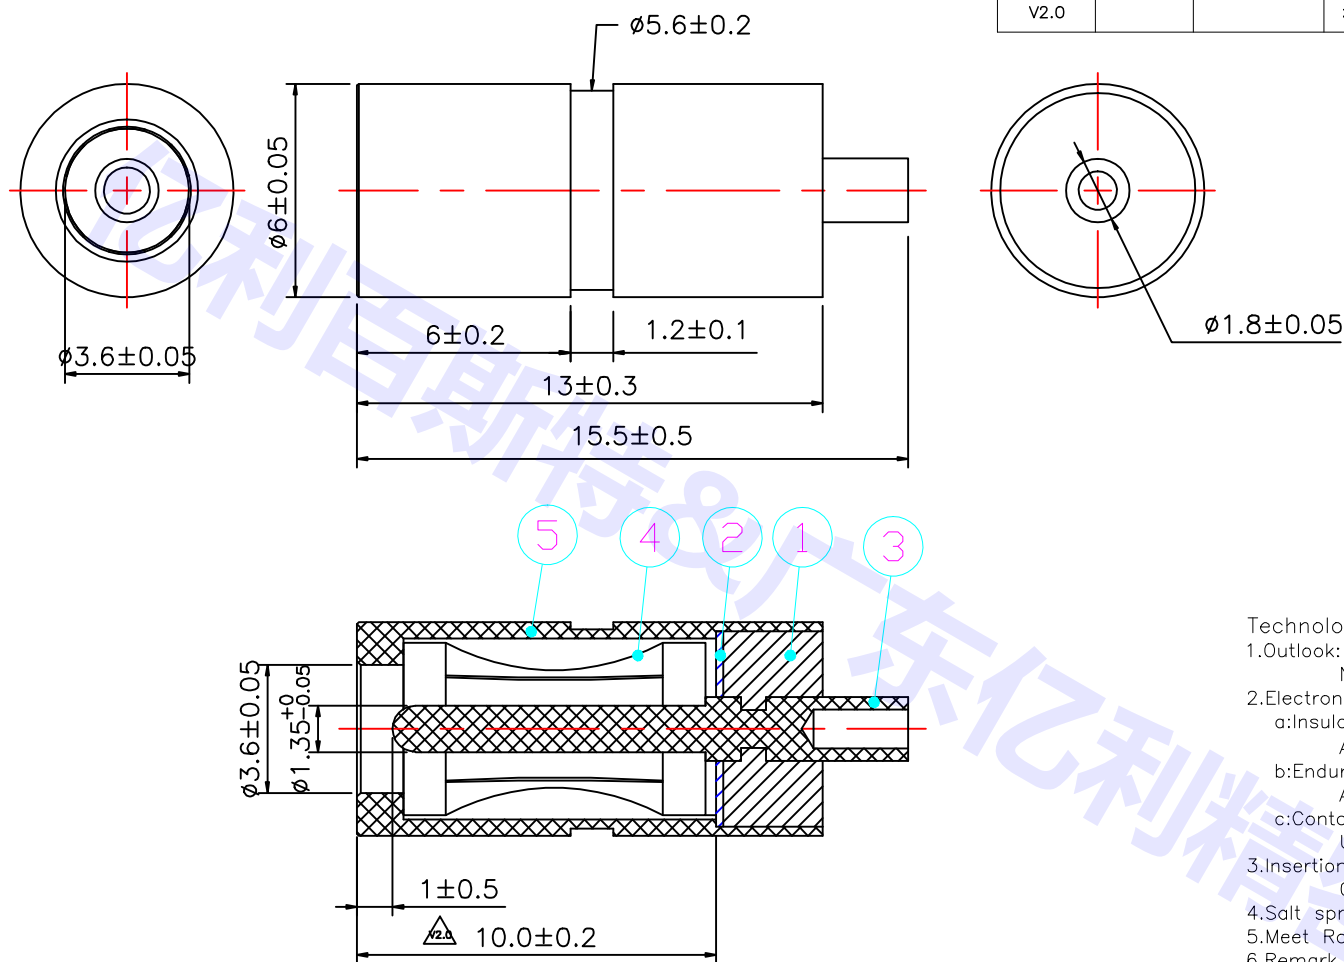

Technology Request:

1.Outlook:

No burr, no hurt.

2.Electronic performance:

a:Insulation resistance:

Above DC500V/100MQ;

b:Endure voltage:

AC500V at 1 minute;

c:Contact resistance:

Under 30mΩ;

3.Insertion force & withdrawal force:

0.3-3kgf.

4.Salt spray test:24H.

5.Meet RoHS.

6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
比例 Scale	5:1	xx.:±0.3	5	6*13*3.6管	C5191	Ni 1~3um			
视图 Third angle projection		xx.:±0.1	4	4.85*8.5弹圈	C5191	Ni 1~3um			
		xx.:±0.05	3	1.3*1.8*14.3针	C3604	Ni 1~3um			
			2	5.5*1.2*0.5硅胶垫 透明	硅胶				
			1	PLASTIC	PA9T	BLACK			
			NO.	PART	MATERIAL	PLATING			

June

杨义邦

李莹峰

GDEL 深圳市亿利百斯特电子有限公司
广东亿利精密电子有限公司

规格 DESCRIPTION: DC JACK Ø3.5*1.35*15.5

品名 P/N: 35135J60PA9T

图号 DRAWN NO: CP-03-0030